


PROPRIETARY INFORMATION
 THE INFORMATION CONTAINED ON THIS DRAWING IS CONSIDERED PROPRIETARY AND MAY NOT, IN WHOLE OR IN PART, BE REPRODUCED OR USED FOR THE MANUFACTURE OF THE PART DISCLOSED HERE-IN WITHOUT THE WRITTEN PERMISSION OF CENTRAL MOLONEY, INC.

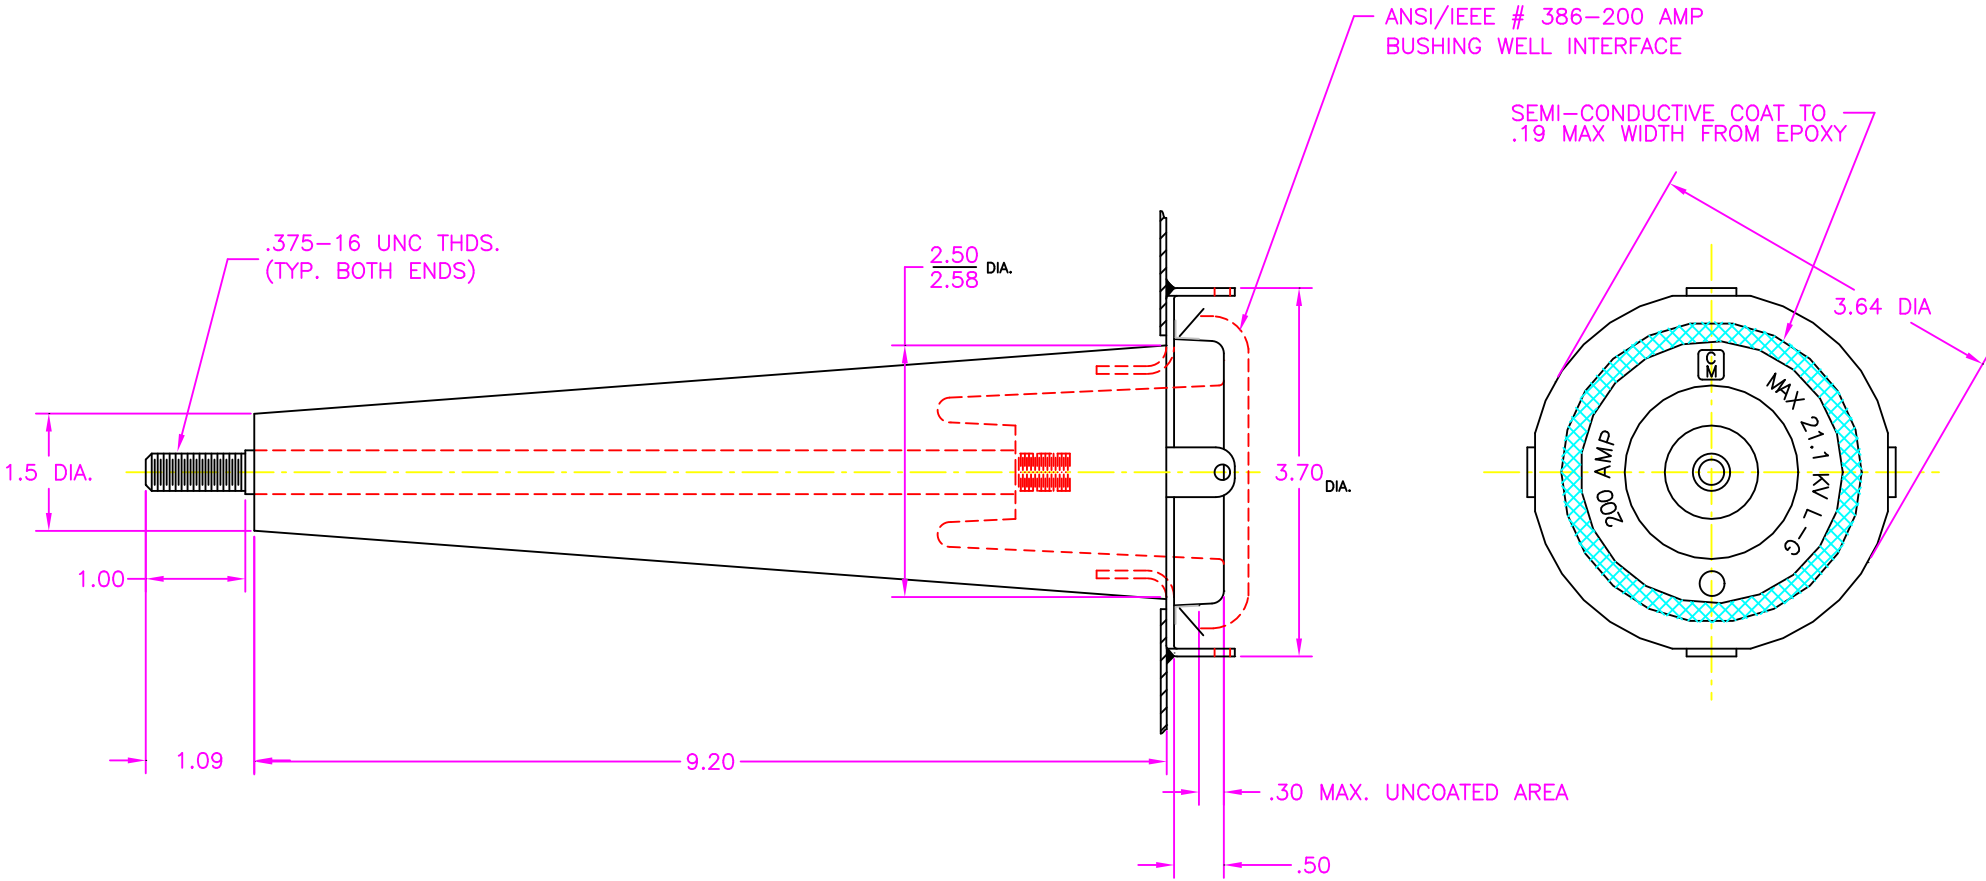

ELECTRICAL RATING			
MAX LINE TO GROUND	IMPULSE LEVEL	CORONA EXTINCTION	CONTINUOUS CURRENT
21.1 KV RMS	150 KV B.I.L.	26 KV	200 AMPERES

MOUNTING HOLE
2.625 DIA.

NOTE: ALL DIMENSIONS ARE IN INCHES

ITEM	DESCRIPTION	RM-PP-CC NO.	QTY	U/M
2	PROTECTIVE CAP (NOT SHOWN)	70000259	1	EA
1	BUSHING	70223350	1	EA

DRWN BY: B.M.	SCALE: FULL		Central Moloney, Inc. Components Operation 5500 Jefferson Parkway—Phone (870) 247-5320—Pine Bluff, Arkansas 71602
DATE: 7/7/10			
TOLERANCES UNLESS OTHERWISE SPECIFIED .X=±.100 .XX=±.050 .XXX=±.010		TITLE: WELD WELL BUSHING RUBBER COATED FLANGE W/ BAIL TABS	NO. 70223351 REV.

NO.	REVISION	EDN NO.	DATE