


REVISIONS					
NO	DATE	ECN#	REMARKS	BY	APPD.
1	8/17/2016	PQI# 12305	Ø.43" [11mm] HOLES WERE Ø.56"	CLS	MP
2	1/21/2022	HJ21-097	GASKET GROOVE DEPTH WAS .125"	MAD	CJT

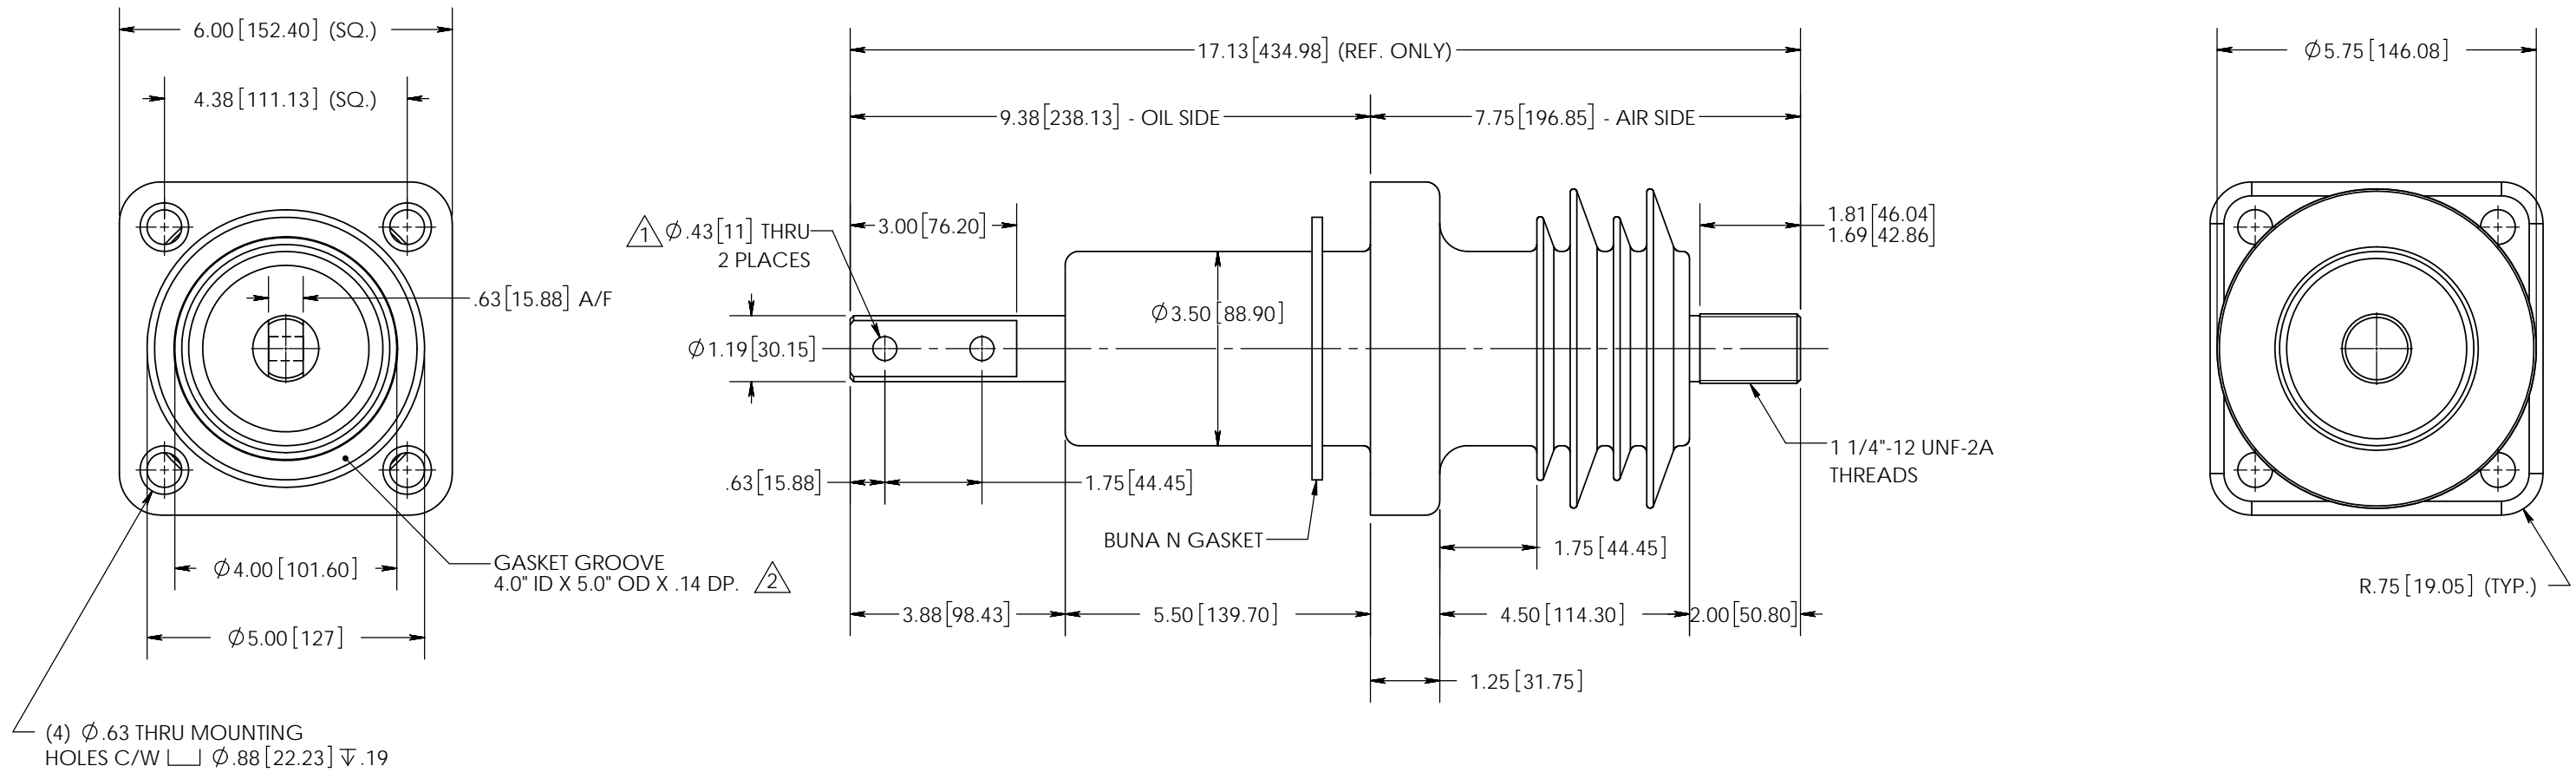

NOTES:
 1. ALL CONTACT SURFACES TO BE CLEAN & FREE FROM FLASH
 2. RECOMMENDED OPENING: Ø4.00 (MIN.)

MATERIAL:
 1. E07 - CYCLOALIPHATIC EPOXY (U.V. EXPOSED)
 2. C11000 GRADE COPPER, TIN PLATED

SPECIFICATIONS:
 1. RATED VOLTAGE 5kV
 2. POWER FREQUENCY WITHSTAND 19kV
 3. BASIC IMPULSE LEVEL 60kV AIR/AIR, 75kV AIR/OIL
 4. NOMINAL CURRENT RATING 1200 AMPS
 5. CREEP DISTANCE 10"
 6. TEMPERATURE RANGE -40°C TO 105°C

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF H-J INTERNATIONAL, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF H-J INTERNATIONAL, INC. IS STRICTLY PROHIBITED.

BREAK ALL SHARPS UNLESS OTHERWISE NOTED

TOLERANCES (EXCEPT AS NOTED)
 ONE PLACE MM ±1.50
 TWO PLACE MM ±0.75
 TWO PLACE DEC. ±.060
 THREE PLACE DEC. ±.030
 FRACTIONS ± 1/16"
 ANGLES 2°

		APPROVED BY	DATE
		CHECKED BY	DATE
DRAWN BY	CLS	DATE	08/11/2016
TOOL NO.	T20-000		
PRODUCT GRP.	2000 SERIES		

H-J INTERNATIONAL, INC.
 3010 HIGH RIDGE BLVD, HIGH RIDGE, MO. 63049 USA
 PHONE 1-636-677-3421 FAX 1-636-376-1915

2000 SERIES
 5kV POWER
 APPARATUS BUSHING

DRAWING NO. **20-000-105**

SCALE 1:3 SIZE B REV. 2 SHEET 1 OF 1