


REVISIONS					
REV.	DATE	ECN #	DESCRIPTION	BY	APP'D

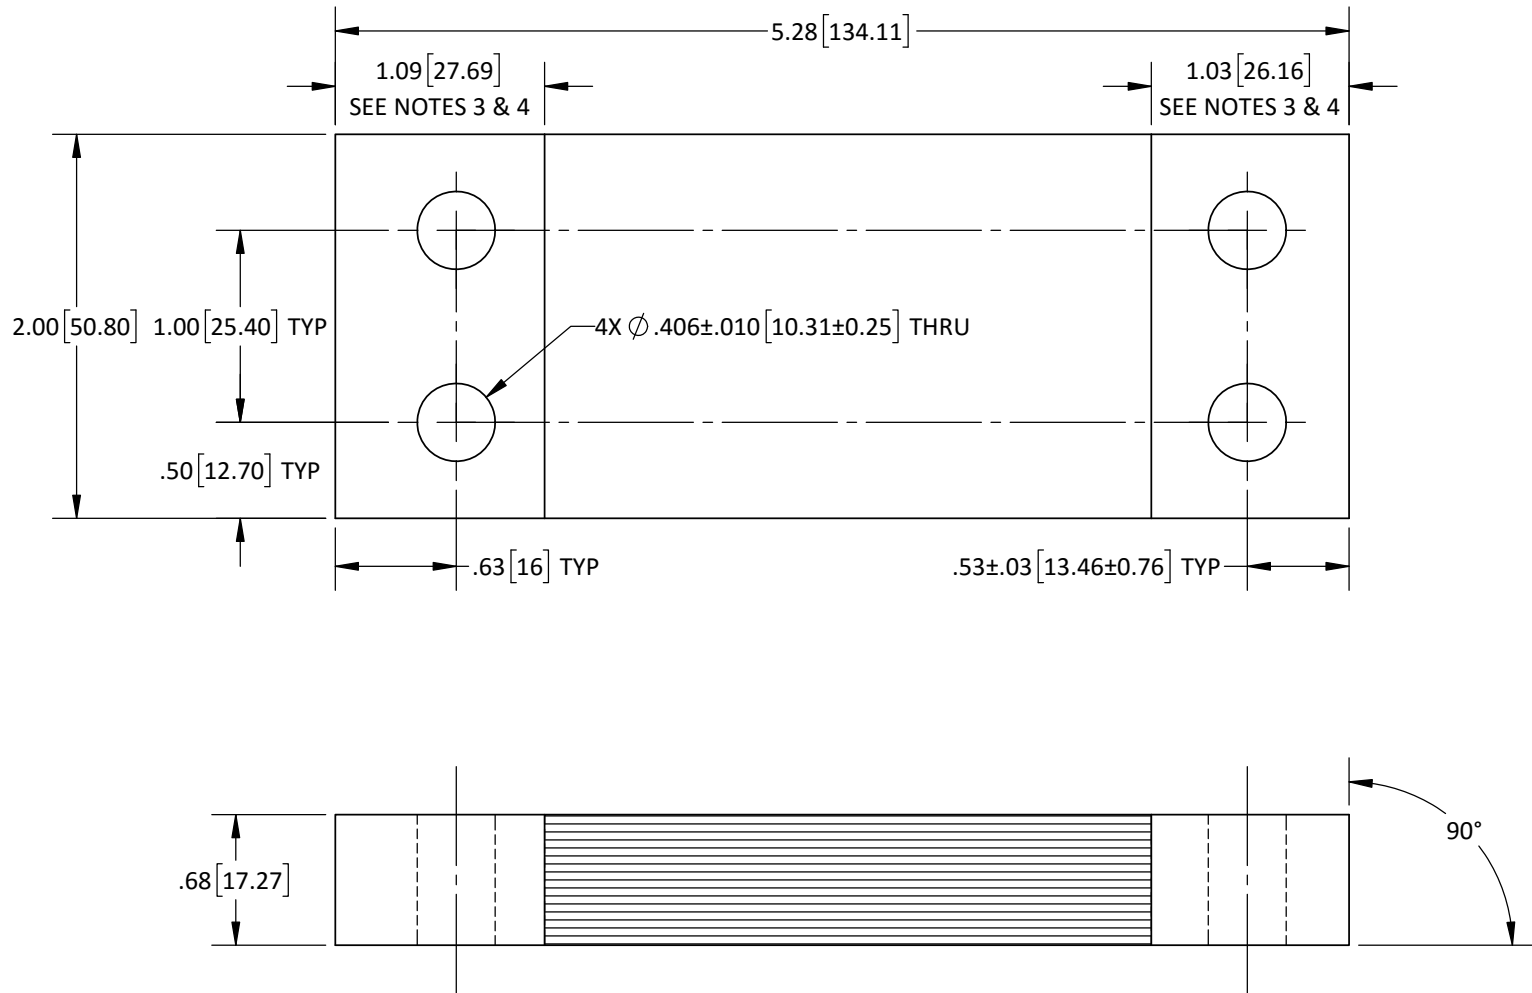

NOTES:

1. REMOVE ALL BURRS AND SHARP EDGES
2. MAT'L: COPPER FOIL C110, 0.001"-0.002"THICK. ANY LAMINATIONS THICKNESS (INCLUDING THE UPPER AND LOWER LIMITS) WITHIN THIS RANGE IS ACCEPTABLE AS LONG AS THE OVERALL SHUNT THICKNESS IS MET. ANY DEVIATION FROM THIS RANGE OF THICKNESS REQUIRES APPROVAL OF END USER
3. ENDS SHALL BE SOLDERED AND PRESSED TO PREVENT DELAMINATION AND ASSURE MAXIMUM CONDUCTIVITY BETWEEN INDIVIDUAL FOILS. **SOLDER SHALL NOT EXCEED DIMENSIONS SHOWN.**
4. SHUNT LANDING AREA SHALL BE SILVER PLATED QQ-S-365 TYPE 2 GRADE B .0002-.0005 THK, EACH END ON BOTH SIDES.
5. CUSTOMER DRAWING: 4366P01 REV 15

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS
 DRAWING IS THE SOLE PROPERTY OF
 H-J ENTERPRISES, INC. ANY
 REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF
 H-J ENTERPRISES, INC. IS
 PROHIBITED.

REMOVE ALL BURRS & SHARP EDGES

TOLERANCES (EXCEPT AS NOTED) ALL DIMENSIONS ARE IN: in/mm	
DECIMAL	X = ±0 [2.54mm] XX = ±0.03 [0.76mm] XXX = ±0.003 [0.076mm]
FRACTIONAL	±1/32
ANGULAR	±.5°



H - J ENTERPRISES, INC.
 3010 HIGH RIDGE BLVD. HIGH RIDGE, MO. 63049 USA
 PHONE 1-636-677-3421 FAX 1-636-376-1915

COPPER SHUNT 2000A

MATERIAL SEE DRAWING			
CHK'D CJT	APP'D 8/05/16	DRAWING NO. FLEX0161-001	
DRAWN BY TJF	DATE 8/05/2016	SCALE N.T.S.	