



| REVISIONS | | | | | |
|-----------|-----------|------------|--------------------|-----|----------|
| REV. | DATE | ECN # | DESCRIPTION | BY | APPROVED |
| 1 | 5/15/2019 | PQI# 19286 | UPDATED TOLERANCES | CLS | LO |

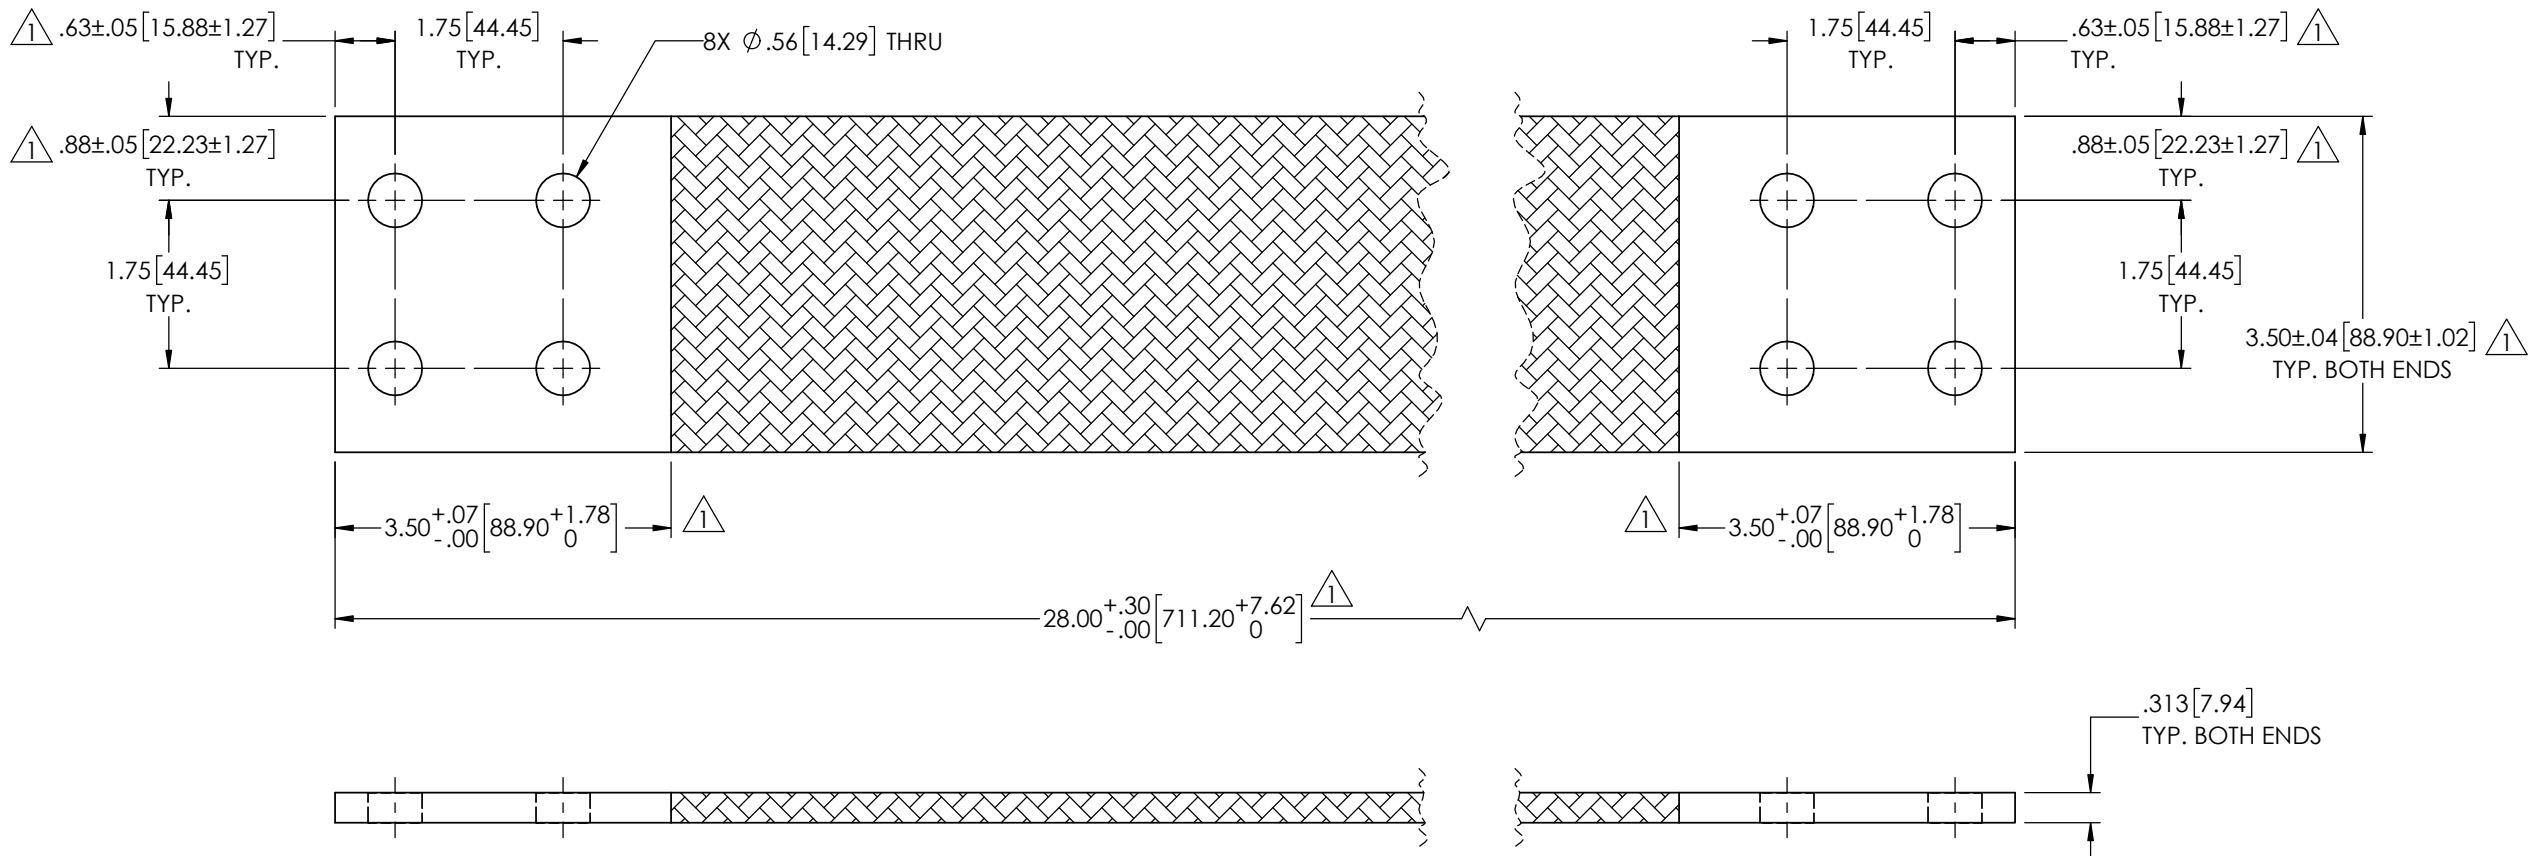

NOTES:

- MUST MEET MINIMUM CURRENT CARRYING CAPACITY OF 820 AMPS.
- PART TO BE FREE OF ALL BURRS & SHARP EDGES.

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF H-J INTERNATIONAL, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF H-J INTERNATIONAL, INC. IS PROHIBITED.



TOLERANCES
(EXCEPT AS NOTED)

DECIMAL
 $\pm .032$ / .8mm
 FRACTIONAL
 \pm
 ANGULAR
 ± 2 Degrees



H - J INTERNATIONAL, INC.
 3010 HIGH RIDGE BLVD. HIGH RIDGE, MO. 63049 USA
 PHONE 1-636-677-3421 FAX 1-636-376-1915

FLEXIBLE COPPER LINK

MATERIAL COPPER C11000 - TIN PLATED

CHK'D CJT APP'D 04/29/19 DRAWING NO.
 SCALE N.T.S.

FLEX0172-001

DRAWN BY CLS DATE 04/29/2019